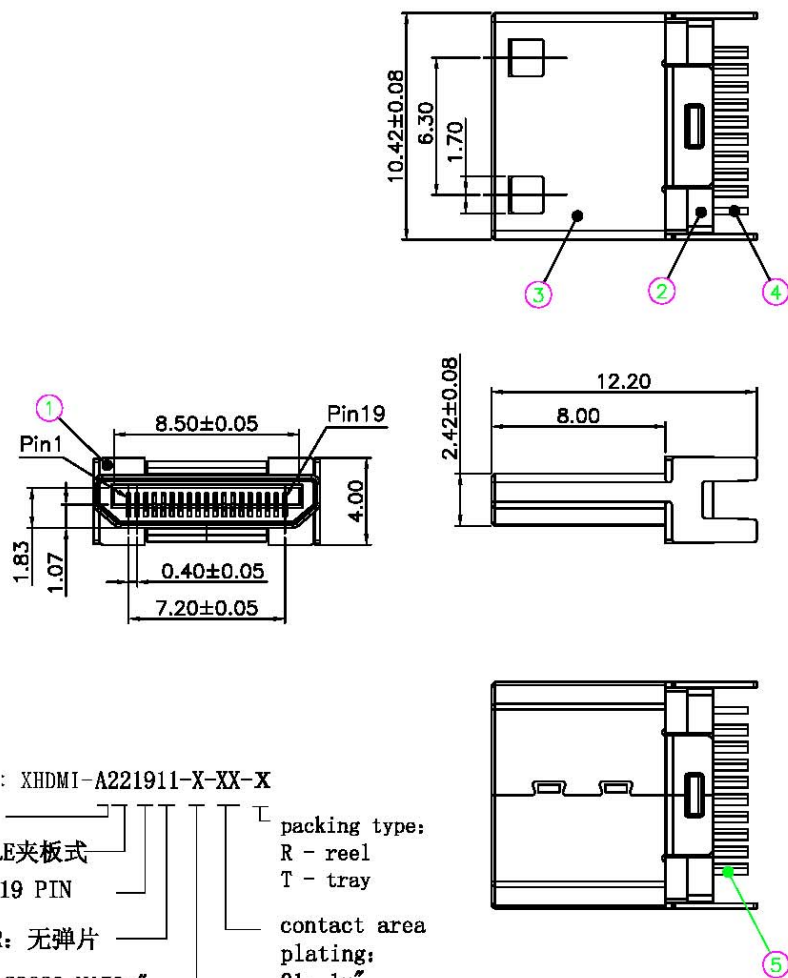


3D示意图

TYPE: A P/N.: XHDMI-A221911-X-XX-X
 - Finished product

SERIES: 22-HDMI C MALE夹板式
 PIN: 19 PIN

SERIAL NUMBER: 无弹片

packing type:
 R - reel
 T - tray

contact area
 plating:
 01: 1u"
 03: 3u"
 05: 5u"
 15: 15u"
 30: 30u"

A: SHELL-C2680, Ni50u"
 B: SHELL-SPCC, Ni50u"
 C: SHELL-C2680, G/F
 B: SHELL-SPCC, G/F

Specifications:

1. Current Rating: 0.5A at 40V AC.
2. Withstanding Voltage: 100V AC for one minute.
3. Insulation Resistance: 100MΩ Min.
4. Contact Resistance: 50mΩ Max.
5. Mating Force: 4.5kgf Max.
6. Unmating Force: 0.71~2.55kgf.

5	10 PIN端子	C5191	——	GOLD/TIN PLATED
4	9 PIN端子	C5191	——	GOLD/TIN PLATED
3	外壳	C2680/SPCC	——	GOLD/NICKEL PLATED
2	后塞	LCP	BLACK	UL 94V-0
1	胶芯	LCP	BLACK	UL 94V-0
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

UNIT	mm	Projection		Xmultiple Technologies, Inc.			
TOLERANCES				TITLE			
General Tolerance		Angle Tolerance		HDMI C Male Type Connector			
30~ = ± 0.3		x.° = ± 2°					
10-30 = ± 0.2		.x° = ±					
~10 = ± 0.15		.xx° = ±					
DRAWN	Kevin	DATE	2009/6/10	PART NO.	XHDMI-A221911-x-xx-x		
SCALE	1:1	SIZE	A4	SHEET	1/1	REV	A0